

Marvell® AQtion AQC100 10 GbE MAC Controller

Low-power, Small-footprint and Cost-effective PCI Express to SFP+ Solution


Overview

The Marvell® AQtion AQC100 10G Ethernet MAC controllers provide a flexible and highly optimized 10G solution to enable SFP+ port or backplane connectivity. Its 7 mm x 11 mm package offers a small-footprint, cost-effective PCI Express to 10GbE solution that can be used in a range of applications including gateways, routers, switches, workstations, servers, chassis-based systems, Network Attached Storage (NAS), Network Interface Cards (NICs) and other embedded applications.

By using the AQtion AQC100 10G controller for applications that require SFP+ modules, both fiber and copper modules can be supported. The AQtion AQC100 lowers costs, complexity, and power by delivering the following benefits and features:

- PCI Express 3.0 with x4/x2/x1 lane operation
- SFP+ for Direct Attach Copper (DAC) and optical SFP modules
- Board-level or backplane connectivity between chips
- Support for Windows, macOS, Linux, Data Plane Development Kit, and other operating systems
- Less than 1W power consumption

Block Diagram

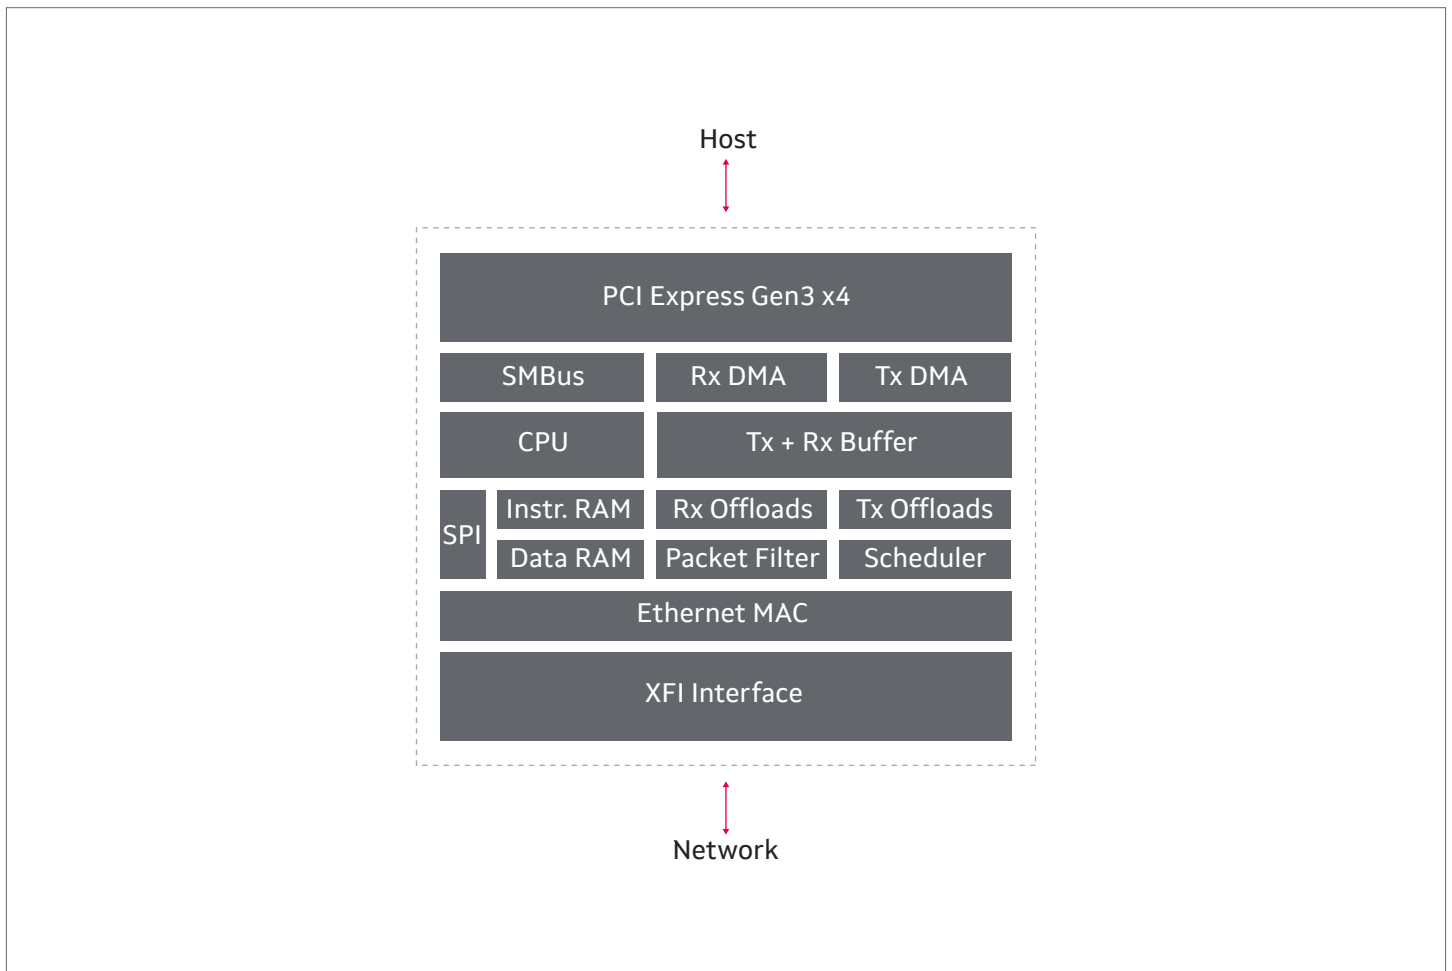

Key Features

MAC Specific Features	Benefits
<ul style="list-style-type: none">• Large Send Offload (LSO)• Receive Side Scaling (RSS)• Direct Cache Access (DCA)• Header checksum	<ul style="list-style-type: none">• Increased network performance and lower host CPU utilization
Wake-on-LAN (WoL) power management	<ul style="list-style-type: none">• Supports lower power modes
On chip CPU DASH	<ul style="list-style-type: none">• Desktop management
Internet Control Message Protocol (ICMP)	<ul style="list-style-type: none">• Supports diagnostic, error, and operational information messages
Address Resolution Protocol (ARP)	<ul style="list-style-type: none">• Resolves network layer addresses into link layer addresses
Multicast Domain Name System (mDNS)	<ul style="list-style-type: none">• Resolves host names to IP addresses
Transmission Control Protocol (TCP) Keepalive (KA)	<ul style="list-style-type: none">• Supports link checking between devices
Quality of Service (QoS) support	<ul style="list-style-type: none">• Supports up to eight traffic classes and Data Center Bridging (DCB)
Jumbo frames (up to 16 Kbytes)	<ul style="list-style-type: none">• Improves network performance while reducing CPU utilization
IPv4/6, IPv6/TCP and IPv6/UDP checksum offload	<ul style="list-style-type: none">• Offloads calculations and improved CPU usage

Target Applications

The AQtion AQC100 10GbE MAC controller is designed for SFP+ NICs, SFP+ dongles, NAS, routers, gateways, and other embedded applications.

Drivers: Marvell provides driver support for Windows and Linux

Utilities: Product test tool, ROM programming and Windows Installer

Boot Options: UEFI and PXE

Package: 7 mm x 11 mm, 0.8 mm pitch flip chip ball Grid Array (FCBGA)



Marvell first revolutionized the digital storage industry by moving information at speeds never thought possible. Today, that same breakthrough innovation remains at the heart of the company's storage, networking and connectivity solutions. With leading intellectual property and deep system-level knowledge, Marvell semiconductor solutions continue to transform the enterprise, cloud, automotive, industrial, and consumer markets. For more information, visit www.marvell.com.

© 2020 Marvell. All rights reserved. The MARVELL mark and M logo are registered and/or common law trademarks of Marvell and/or its Affiliates in the US and/or other countries. This document may also contain other registered or common law trademarks of Marvell and/or its Affiliates.

Marvell_AQC100_PB Revised: 04/20